

Process Model Test

In Response to JIRA Issues 31, 55 and 56

8/12/15

Questionnaire Data Collection Context

Our design bindings don't create correspondences between outputs and inputs in process steps. Instead, in order to make workflows reusable, bindings are specified separately for "execution pairs" associated with control constructs

Care Quality Data Collection [Process]

Workflow and Data Flow [Sequence]

A Collection of Allen's Interval Algebra Temporal Interval Relation Pairs [TemporalIntervalRelation]

Insurer Claims Data Collection precedes EHR Data Collection [PrecedesRelationPair]

EHR Data Collection precedes Patient Reported Outcomes Data Collection [PrecedesRelationPair]

Insurer Claims Data Collection [ProcessStep]


EHR Data Collection [ProcessStep]

EHR Data Collection [ProcessStep]

Patient Reported Outcomes (PRO) Data Collection [ProcessStep]



Questionnaire Data Collection

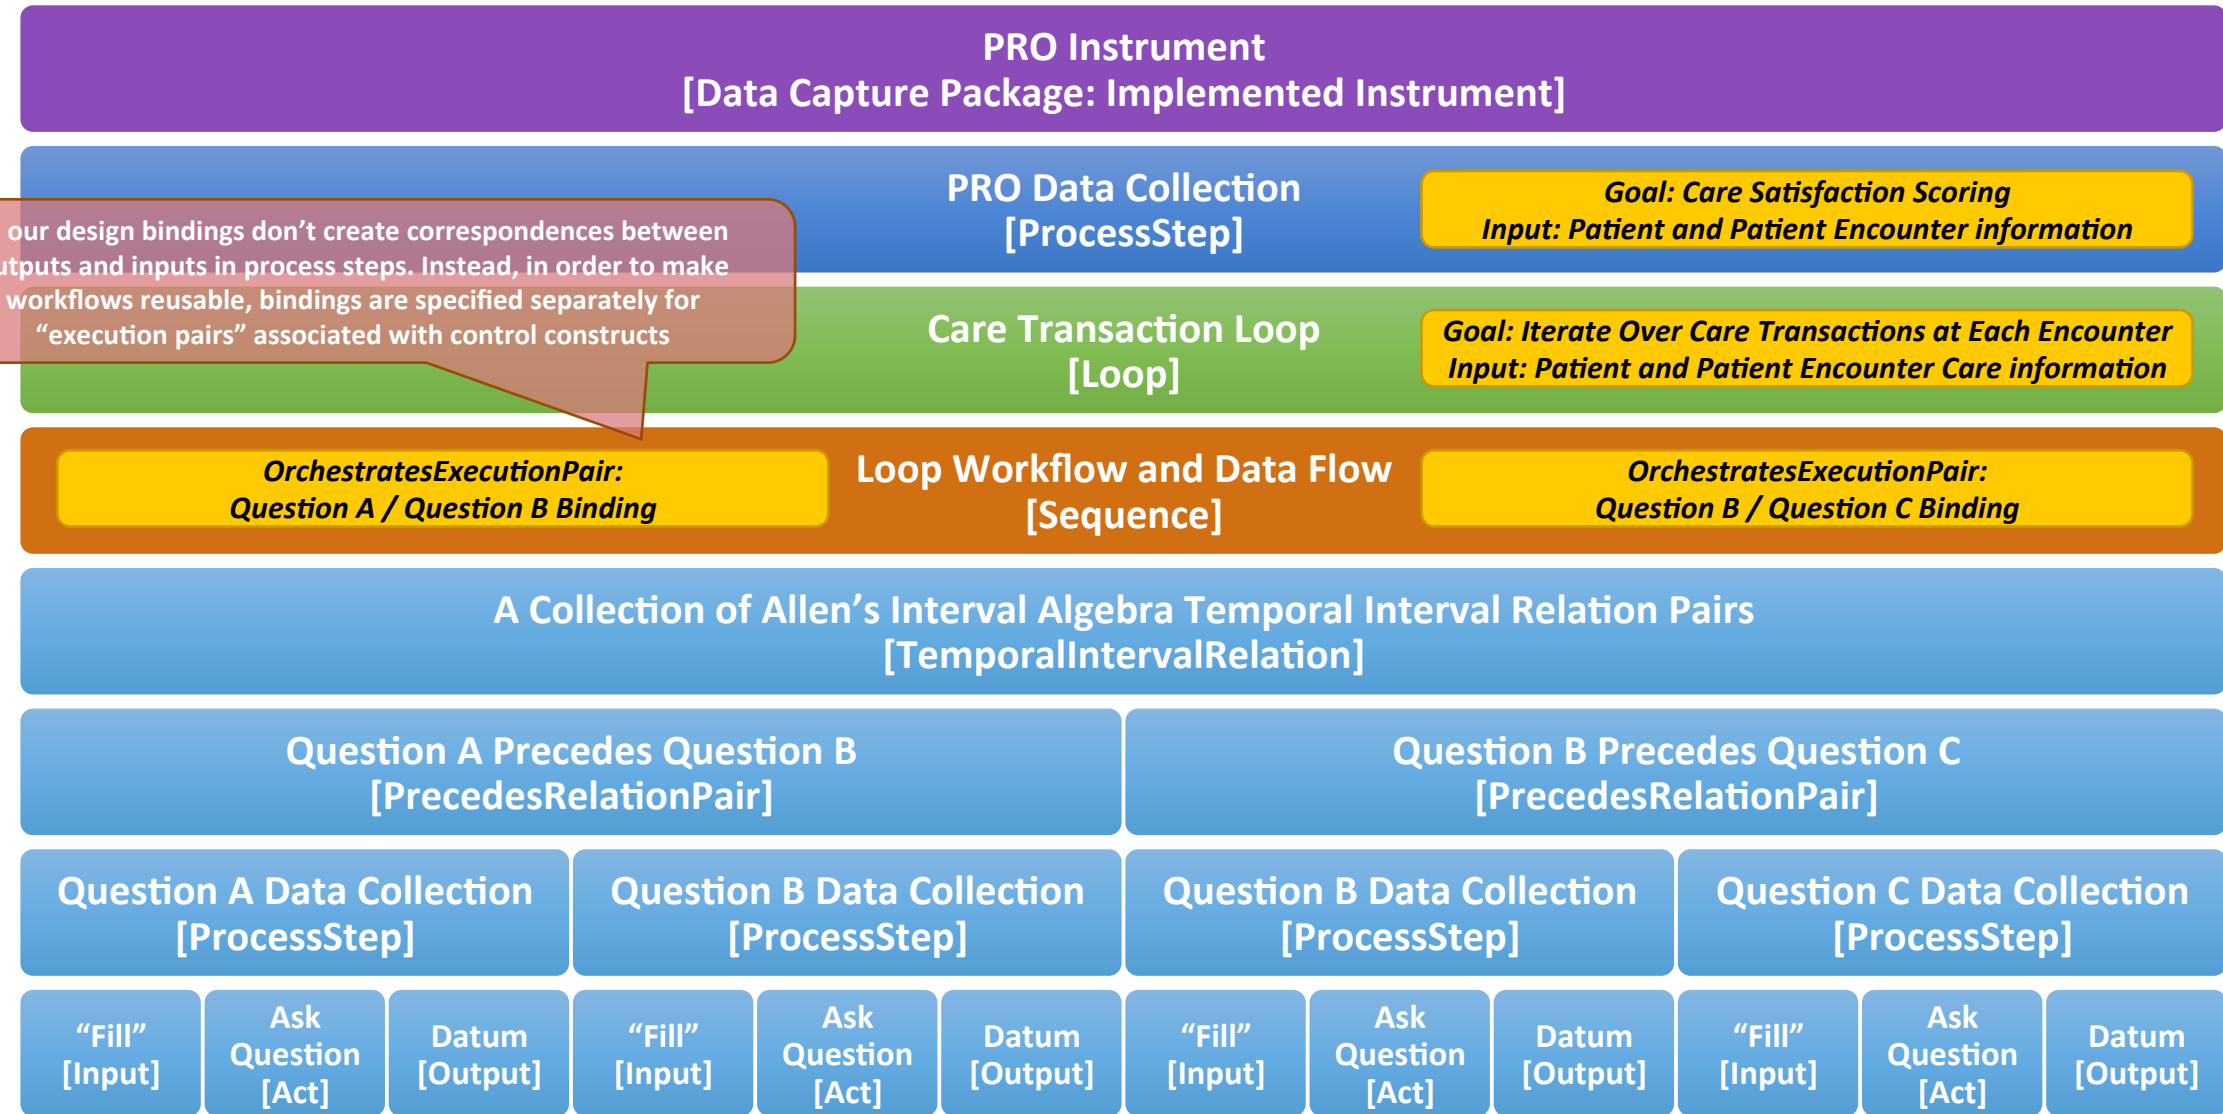

our design bindings don't create correspondences between outputs and inputs in process steps. Instead, in order to make workflows reusable, bindings are specified separately for "execution pairs" associated with control constructs